




J. ENNIS FABRICS **CORNERBLOCK**



59 Gold

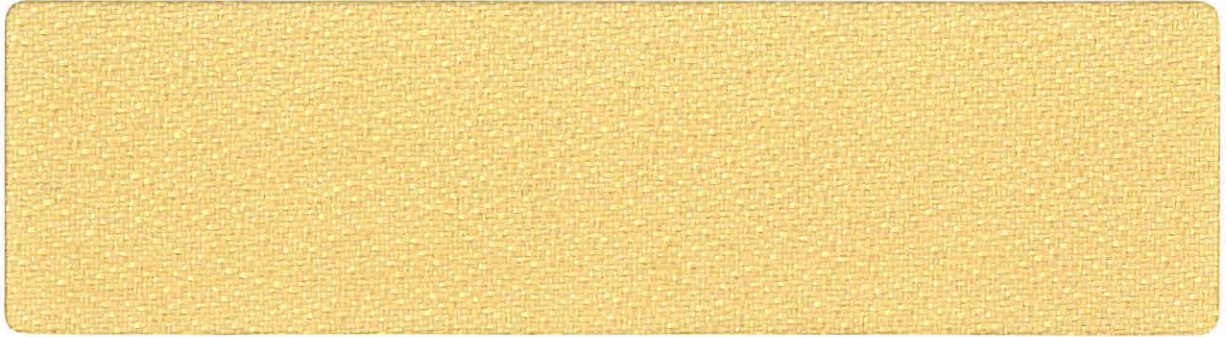

59 Gold



405 Terracotta



14 Red



108 Burgundy



32 Mist



308 Navy



64 Eucalyptus



208 Green



1009 Purple



87 Brown



908 Charcoal



9009 Black

CORNERBLOCK

SPECIFICATIONS


CONTENT	100% Polyester
BACKING CONTENT	100% Acrylic
ABRASION	Exceeds 420,000 Double Rubs: Contract Rated
SEAM SLIPPAGE	ASTM D434: Warp = 61lbs, Fill = 66lbs
TEAR STRENGTH	ASTM D2261: Warp = 54lbs, Fill = 72lbs
TENSILE STRENGTH	ASTM D5034: Warp = 491lbs, Fill = 364lbs
CROCKING	AATCC 8: Dry = Class 4.5, Wet = Class 4.5
PILLING	ASTM D3511: Class 4.5
UV / LIGHT FASTNESS	AATCC 16: Class 4.5, 40 Hours
FIRE RETARDANCY*	California Bulletin 117 - Section E UFAC Class 1 (Cigarette Burn) Fire Code MVSS 302
WEIGHT	17.51 Ounces per Linear Yard 11.06 Ounces per Square Yard
WIDTH	57" (145 cm)
ROLL SIZE	50 Yards
CLEANING INSTRUCTIONS	S - Solvent Cleaner

*This term and any corresponding data refer to typical performance in the specific tests indicated and should not be construed to imply the behavior of this or any other material under actual fire conditions. This information is offered for your general guidance only. It's accurate to the best of our knowledge and is not intended to relieve the user from its responsibility to investigate and understand other pertinent sources of information and to comply with all laws and procedures applicable to the safe handling and use of this material. Final determination of the suitability of any product for an application rests with the user.

SPÉCIFICATIONS

COMPOSITION	100% Polyester
COMPOSITION DU SUPPORT	100% Acrylique
RÉSISTANCE À L'ABRASION	Excède 420 000 double frottements: évalué contrat
GLISSEMENT DE LA COUTURE	ASTM D434: Chaîne = 61lbs, Trame = 66lbs
RÉSISTANCE À LA DÉCHIRURE	ASTM D2261: Chaîne = 54lbs, Trame = 72lbs
RÉSISTANCE À LA TRACTION	ASTM D5034: Chaîne = 491lbs, Trame = 364lbs
DÉGORGEMENT	AATCC 8: Mouillé = Classe 4.5, Sec = Classe 4.5
BOULOCHAGE	ASTM D3511: Classe 4.5
RÉSISTANCE AUX RAYONS	AATCC 16: Classe 4.5, 40 Heures
RÉSISTANCE AU FEU*	Bulletin de Californie 117 - Section E UFAC Classe 1 MVSS 302
POIDS	17.51 onces par verge linéaire 11.06 onces par verge carrée
LARGEUR	57" (145 cm)
TAILLE DE ROULEAU	50 verges
INSTRUCTIONS DE NETTOYAGE	S - Détergent à base de solvant

*Les résultats rapportés d'après la norme ci-dessus ne définissent pas nécessairement les risques que représente ce matériau dans des conditions réelles d'incendie. Ces renseignements sont offerts à titre consultatif seulement. Ils sont précis, aux mieux de nos connaissances, et ne sont pas destinés à décharger l'utilisateur de sa responsabilité d'étudier et de comprendre les autres sources pertinentes de renseignements, ni de se conformer à toutes les lois et procédures relatives à la manipulation et à l'utilisation sécuritaire de ce matériau. La décision finale du type d'application du produit appartient à l'utilisateur.

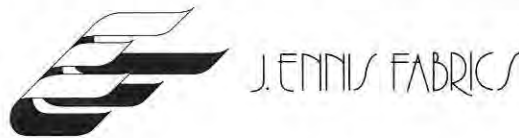

TORONTO • EDMONTON • VANCOUVER • INDIANAPOLIS

Head Office 12122 - 68 Street, Edmonton Alberta T5B 1R1 Canada
Canada: 1-800-66-ENNIS Français: 1-888-66-ENNIS USA: 1-877-95-ENNIS
www.jennisfabrics.com



00223065
0810